*An Aura of Exclusivity.*

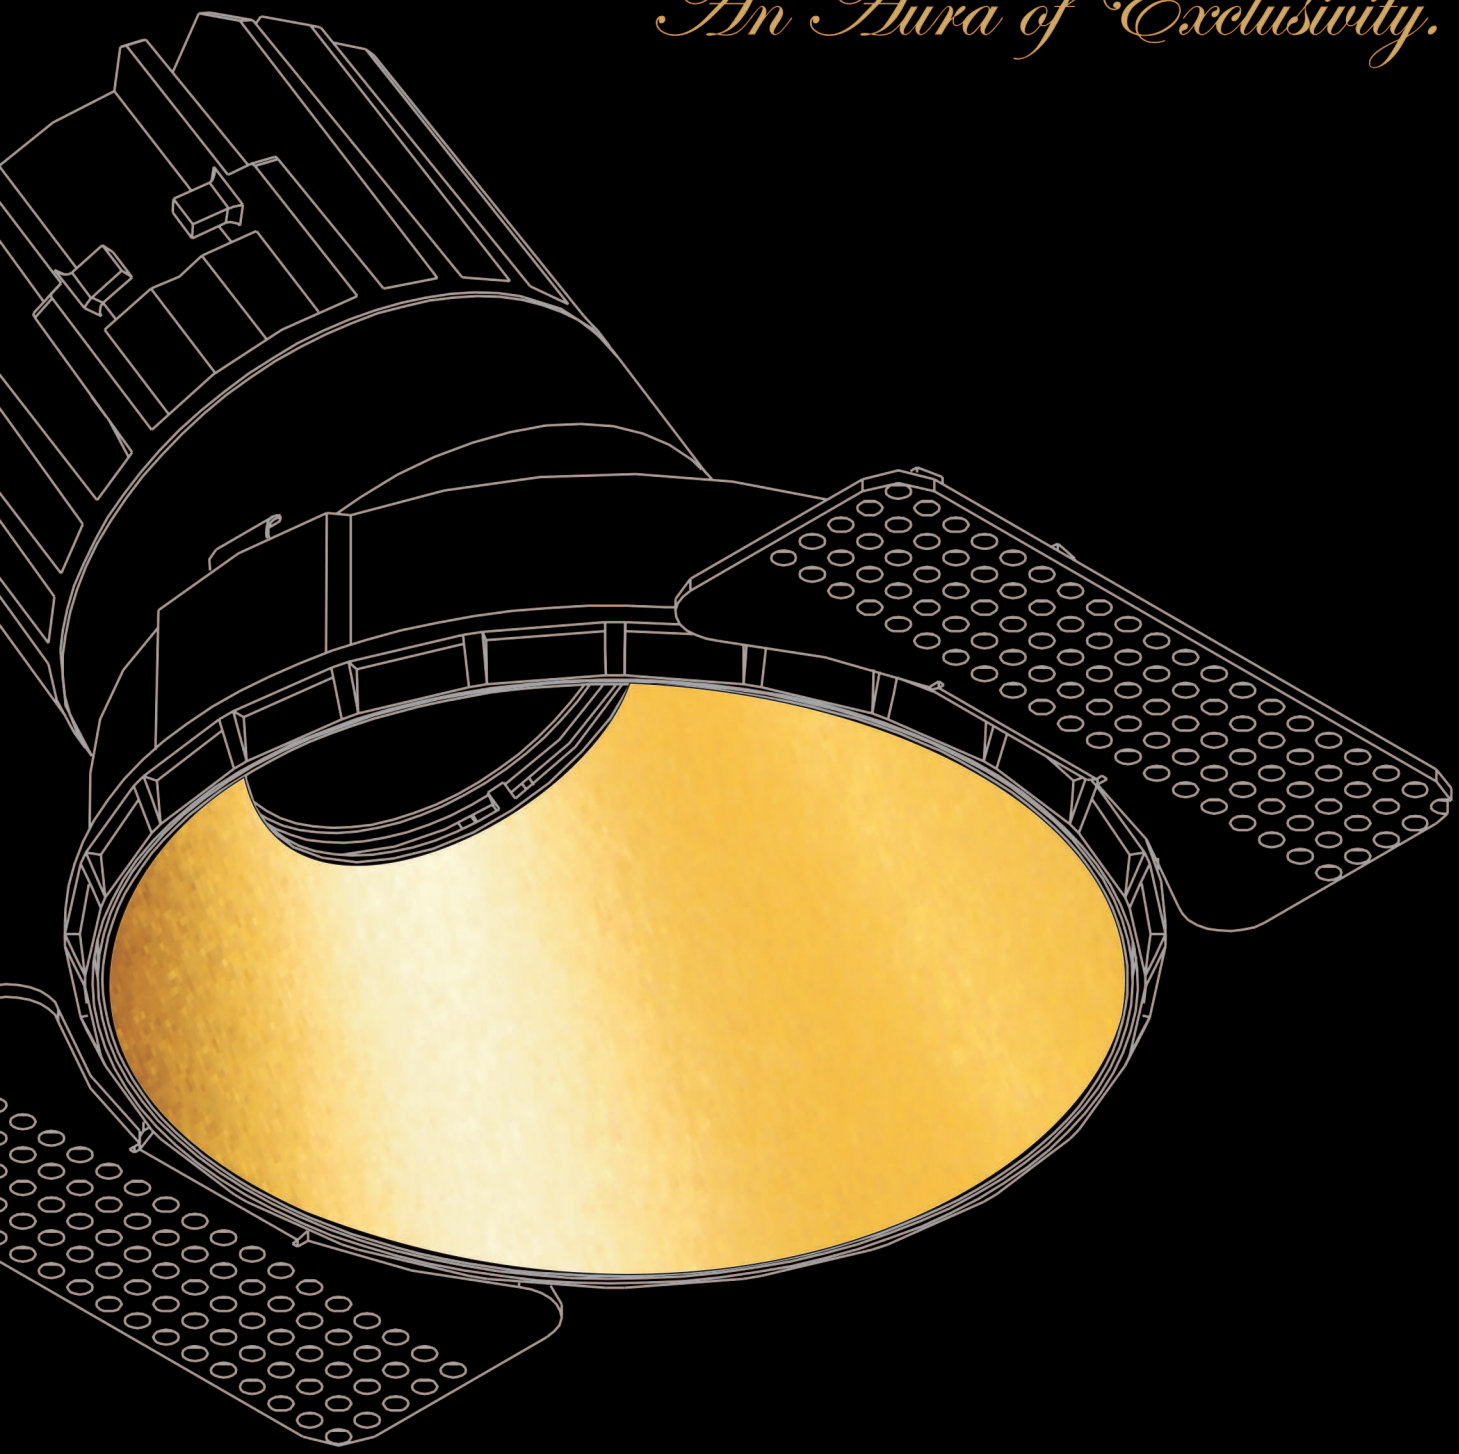

HYBEC® PRO

lighting the future

Hybec's flagship product for professional architects and interior designers, the Pro Series is inspired by the European design tradition.

All source fittings in the premium series are hidden, to create a variety of light illusions.
One flick of a switch can unveil the true power of your designs.

We work closely with Architects, Interior Designers, and Structural Engineers to achieve a concept that compliments the design and ensure a clean and bedazzling installation.

HYBEC® PRO
lighting the future

# CEILING RECESSED

HYBEC PRO
lighting the future

PRO-121 + R1
pg:05

PRO-121 + R2
pg:05

PRO-121 + R3
pg:05

PRO-123 + R11
pg:07

PRO-123 + R12
pg:07

PRO-123 + R13
pg:07

PRO-123 + R14
pg:07

PRO-123 + R15
pg:07

PRO-124 + R11
pg:09

PRO-124 + R12
pg:09

PRO-124 + R13
pg:09

PRO-124 + R14
pg:09

PRO-124 + R15
pg:09

PRO-125 + R21
pg:11

PRO-125 + R22
pg:11

PRO-125 + R23
pg:11

PRO-130
pg:12

PRO-135
pg:13

PRO-141
pg:13

PRO-142
pg:15

PRO-143
pg:15

PRO-146
pg:16

PRO-147
pg:16

PRO-148
pg:17

PRO-149
pg:17

# CEILING RECESSED

HYBEC PRO
lighting the future

PRO-151
pg:19

PRO-152
pg:20

PRO-153
pg:20

PRO-155
pg:21

PRO-156
pg:23

PRO-158
pg:25

PRO-159
pg:25

PRO-161
pg:27

PRO-162
pg:27

PRO-164
pg:29

PRO-165
pg:29

PRO-168
pg:31

PRO-169
pg:31

PRO-170
pg:31

PRO-171
pg:35

PRO-172
pg:35

PRO-174
pg:35

PRO-175
pg:35

PRO-177
pg:37

PRO-178
pg:37

PRO-179
pg:39

PRO-180
pg:39

PRO-181
pg:41

PRO-183
pg:43

PRO-185
pg:43

PRO-186
pg:45

PRO-188
pg:47

PRO-189
pg:47

# CEILING RECESSED

PRO-194
pg:49

PRO-201
pg:51

PRO-202
pg:51

PRO-207
pg:53

PRO-213
pg:55

PRO-214
pg:56

PRO-217
pg:57

PRO-219
pg:57

# CEILING SURFACE

PRO-301
pg:58

PRO-302
pg:58

PRO-304
pg:59

PRO-305
pg:60

PRO-306
pg:60

PRO-310
pg:61

PRO-312
pg:62

PRO-314
pg:63

# CONCEALED FOOT LIGHT

PRO-341
pg:65

PRO-351
pg:65

CE IP20

# LED DOWN LIGHT

## LED MODULE LIGHT
**Model No.: PRO-121**

Housing Material : Aluminium
Body Colour : White
**Power :4W**
Light Source : CREE LED
Beam Angle : 24°
CRI >80
Current : 9V 350mA

**COLOUR :**

- ☐ Warm White (3000K) (250LM±5%)
- ☐ Daylight (4000K) (265LM±5%)

**Model No.: R1**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : White Outer Rim with Black Recessed

Product Size : ø45x56mm
Cut-Out Size : ø37mm




¢ 37(Cut out)

**Model No.: R2**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE

Product Size : ø45x54mm
Cut-Out Size : ø40mm




¢ 40(Cut out)

**Model No.: R3**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

Product Size : ø45x54mm
Cut-Out Size : ø40mm




¢ 40(Cut out)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## LED MODULE LIGHT
**Model No.: PRO-123**

Housing Material : Aluminium
Body Colour : Metallic Grey
**Power :8W**
Light Source : CREE LED
Beam Angle : 30°
CRI >80
Current : 18V 350mA




**COLOUR :**

- ☐ Warm White (3000K) (600LM±5%)
- ☐ Daylight (4000K) (635LM±5%)

## Model No.: R11
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : White Outer Rim with Black Recessed

Product Size : ø65x70mm
Cut-Out Size : ø58mm




¢ 58(Cut out)

## Model No.: R12
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE / BLACK

Product Size : ø82x88mm
Cut-Out Size : ø77mm




¢ 77(Cut out)

## Model No.: R13
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

**Product Size : ø82x53mm**
**Cut-Out Size : ø77mm**




¢ 77(Cut out)

## Model No.: R14
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE

**Product Size : 80x80x86mm**
**Cut-Out Size : 68x68mm**




68*68(Cut out)

## Model No.: R15
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

**Product Size : 80x80x86mm**
**Cut-Out Size : 68x68mm**




68*68(Cut out)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## LED MODULE LIGHT
## Model No.: PRO-124

Housing Material : Aluminium
Body Colour : White
**Power :13W**
Light Source : CREE LED
Beam Angle : 30°
CRI >80
Current : 6V 350mA




**COLOUR :**

- ☐ Warm White (3000K) (1205LM±5%)
- ☐ Daylight (4000K) (1270LM±5%)

## Model No.: R11
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : White Outer Rim with Black Recessed

Product Size : ø65x95mm
Cut-Out Size : ø58mm




¢ 58(Cut out)

## Model No.: R12
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE / BLACK

Product Size : ø82x124mm
Cut-Out Size : ø77mm




¢ 77(Cut out)

## Model No.: R13
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

Product Size : ø82x124mm
Cut-Out Size : ø77mm




¢ 77(Cut out)

## Model No.: R14
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE

**Product Size : 82x82x124mm**
**Cut-Out Size : 77x77mm**




¢ 77(Cut out)

## Model No.: R15
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

**Product Size : 82x82x124mm**
**Cut-Out Size : 77x77mm**




¢ 77(Cut out)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## LED MODULE LIGHT
**Model No.: PRO-125**

Housing Material : Aluminium
Body Colour : White
**Power :20W**
Light Source : CREE LED
Beam Angle : 30°
CRI >80
Current : 36V 500mA




**COLOUR :**

- ☐ Warm White (3000K) (1900LM±5%)
- ☐ Daylight (4000K) (2000LM±5%)

**Model No.: R21**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : White Outer Rim with Black Recessed

Product Size : ø91x141mm
Cut-Out Size : ø82mm




¢ 82 (Cut out)

**Model No.: R22**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : WHITE

Product Size : ø106x159mm
Cut-Out Size : ø100mm




¢ 100 (Cut out)

**Model No.: R23**
LED DOWNLIGHT HOUSING

Housing Material : Aluminium
Body Colour : GOLD

Product Size : ø106x159mm
Cut-Out Size : ø100mm




¢ 100 (Cut out)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

HYBEC PRO
lighting the future

CE IP20

# LED DOWN LIGHT




## Model No.: PRO-130

Housing Material : Aluminium Die-Cast
Body Colour : Matte Black
**Power : 8.7W**
Light Source : CREE LED
Beam Angle : 16.8°
CRI : 90
Current : 700mA

**COLOUR :**

Warm White (3000K) (450LM ± 5%)

Daylight (4000K) (473LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-135

Housing Material : Aluminium Die-Cast
Body Colour : **White / Black**
**Power : 6.2W / 8.9W**
Light Source : BRIDGELUX LED
Beam Angle : 24°
CRI : 90
Current : 350mA/500mA

**COLOUR :**

Warm White (3000K) (708LM ± 5%)

Daylight (4000K) (744LM ± 5%)




## Model No.: PRO-141

Housing Material : Aluminium Die-Cast
Body Colour : **White / Black**
**Power : 6.2W / 8.9W**
Light Source : BRIDGELUX LED
Beam Angle : 24°
CRI : 90
Current : 350mA/500mA

**COLOUR :**

Warm White (3000K) (708LM ± 5%)

Daylight (4000K) (744LM ± 5%)




Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-142

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 6.9W / 10W / 15W**
Light Source : BRIDGELUX LED
Beam Angle : 32°
CRI : 90
Current : 350mA/500mA/700mA

**COLOUR :**

Warm White (3000K) (768 LM ± 5%)

Daylight (4000K) (806 LM ± 5%)




## Model No.: PRO-143

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 38W**
Light Source : LUMINUS LED
Beam Angle : 38°
CRI : 90
Current : 1050mA

**COLOUR :**

Warm White (3000K) (2250 LM ± 5%)

Daylight (4000K) (2363 LM ± 5%)




Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-146

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 8W**
Light Source : CREE LED
Beam Angle : 25°
CRI : 90
Current : 180mA




**COLOUR :**

Warm White (3000K) (388 LM ± 5%)

Daylight (4000K) (400 LM ± 5%)

## Model No.: PRO-147

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 8W**
Light Source : CREE LED
Beam Angle : 25°
CRI : 90
Current : 180mA




**COLOUR :**

Warm White (3000K) (418 LM ± 5%)

Daylight (4000K) (468 LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-148

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 15W**
Light Source : CREE LED
Beam Angle : 38°
CRI : 90
Current : 350mA




**COLOUR :**

Warm White (3000K) (745 LM ± 5%)

Daylight (4000K) (770 LM ± 5%)

## Model No.: PRO-149

Housing Material : Aluminium Die-Cast
Body Colour : **White**
**Power : 15W**
Light Source : CREE LED
Beam Angle : 38°
CRI : 90
Current : 350mA




**COLOUR :**

Warm White (3000K) (780 LM ± 5%)

Daylight (4000K) (810 LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-151

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 7W/10W
Light Source : Bridgelux LED
Beam Angle : 36°
CRI : 90
Current : 350mA/20V DC - 7w
500mA/20.5V DC - 10w







### COLOUR :

Warm White (3000K) (550LM ± 5%)

Daylight (4000K) (578LM ± 5%)







Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

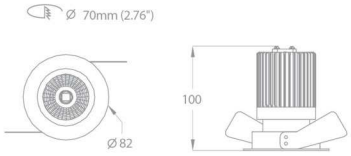


## Model No.: PRO-152

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 10W
Light Source : Sharp LED
Beam Angle : 26°
CRI : 80
Current : 500mA

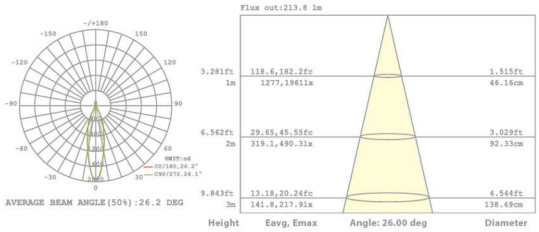


**COLOUR :**

Warm White (3000K) (615 LM ± 5%)

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**




## Model No.: PRO-153

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 10W
Light Source : Sharp LED
Beam Angle : 40°
CRI : 80
Current : 500mA

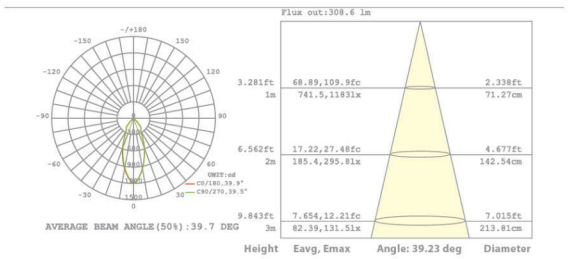


**COLOUR :**

Warm White (3000K) (725 LM ± 5%)

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

HYBEC PRO
lighting the future

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-155

Housing Material : Aluminium Die-Cast
Body Colour : **White**
Power : 9.3W / 13.8W
Light Source : BRIDGELUX LED
Beam Angle : 38°
CRI : 90
Current : 350mA/500mA

**COLOUR :**

Warm White (3000K) (958 LM ± 5%)

Daylight (4000K) (1006LM ± 5%)




Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-156

Housing Material : Aluminium Die-Cast
Body Colour : White & Black
Power : 14W
Light Source : Bridgelux LED
Beam Angle : 30°
CRI : 90
Current : 500mA/28.6V DC




**COLOUR :**

Warm White (3000K) (625LM ± 5%)

Daylight (4000K) (656LM ± 5%)







Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-158

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 7W
Light Source : Bridgelux LED
Beam Angle : 28°
CRI : 90
Current : 350mA/20.75V DC

**COLOUR :**

Warm White (3000K) (350 LM ± 5%)

Daylight (4000K) (370 LM ± 5%)



## Model No.: PRO-159

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (878 LM ± 5%)

Daylight (4000K) (925 LM ± 5%)
















Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20 II

# LED DOWN LIGHT

## Model No.: PRO-161

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 13W
Light Source : Luminus LED
Beam Angle : 38°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (852LM ± 5%)

Daylight (4000K) (895LM ± 5%)



**Also available in Gold Finish**

## Model No.: PRO-162

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 13W
Light Source : Luminus LED
Beam Angle : 38°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (852LM ± 5%)

Daylight (4000K) (895LM ± 5%)



**Also available in Gold Finish**

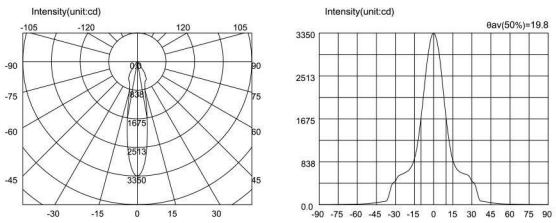


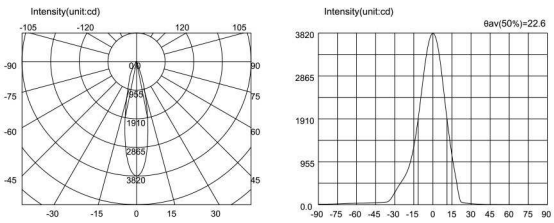


Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20 II

# LED DOWN LIGHT

## Model No.: PRO-164

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 13W
Light Source : Luminus LED
Beam Angle : 38°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (852LM ± 5%)

Daylight (4000K) (895LM ± 5%)



**Also available in Gold Finish**

## Model No.: PRO-165

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 13W
Light Source : Luminus LED
Beam Angle : 38°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (852LM ± 5%)

Daylight (4000K) (895LM ± 5%)



**Also available in Gold Finish**













Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-168

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC




**COLOUR :**

Warm White (3000K) (907 LM ± 5%)

Daylight (4000K) (955 LM ± 5%)

## Model No.: PRO-169

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC




**COLOUR :**

Warm White (3000K) (907 LM ± 5%)

Daylight (4000K) (955 LM ± 5%)

## Model No.: PRO-170

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 2x15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/2x20.75V DC




**COLOUR :**

Warm White (3000K) (1871LM ± 5%)

Daylight (4000K) (1965LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

**S-10**

**S-11**




**S-12**



CE F IP20 II

# LED DOWN LIGHT

## Model No.: PRO-171

Housing Material : Aluminium Die-Cast
Body Colour : White & Black
Power : 13W
Light Source : Luminus LED
Beam Angle : 24°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (682LM ± 5%)

Daylight (4000K) (716LM ± 5%)




## Model No.: PRO-174

Housing Material : Aluminium Die-Cast
Body Colour : White & Black
Power : 13W
Light Source : Luminus LED
Beam Angle : 24°
CRI : 95
Current : 350mA/36V DC

**COLOUR :**

Warm White (3000K) (682LM ± 5%)

Daylight (4000K) (716LM ± 5%)




## Model No.: PRO-172

**Body Colour : White & Gold**

## Model No.: PRO-175

**Body Colour : White & Gold**

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

168315 1*13W 3000K







168415 1*13W 3000K






CE IP20

# LED DOWN LIGHT




## Model No.: PRO-177

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (905 LM ± 5%)

Daylight (4000K) (955 LM ± 5%)

## Model No.: PRO-178

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 2x15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (1207LM ± 5%)

Daylight (4000K) (1267LM ± 5%)










Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20 II

# LED DOWN LIGHT




## Model No.: PRO-179

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 10W
Light Source : Bridgelux LED
Beam Angle : 28°
CRI : 90
Current : 500mA/18.6V DC

**COLOUR :**

Warm White (3000K) (497 LM ± 5%)

Daylight (4000K) (525 LM ± 5%)

## Model No.: PRO-180

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 2X10W
Light Source : Bridgelux LED
Beam Angle : 28°
CRI : 90
Current : 500mA/18.6V DC

**COLOUR :**

Warm White (3000K) (1061LM ± 5%)

Daylight (4000K) (1120LM ± 5%)










Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

## LED DOWN LIGHT

CE IP20

# LED DOWN LIGHT



## Model No.: PRO-181

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (1207LM ± 5%)

Daylight (4000K) (1267LM ± 5%)



**F1**



**F2**









Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

IDEAT
IDEAT
TASCHEN
Meier

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-183

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 9.3W / 13.3W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 350mA / 500mA

**COLOUR :**

Warm White (3000K) (609LM ± 5%)

Daylight (4000K) (639LM ± 5%)




## Model No.: PRO-185

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 9.3W / 13.3W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 350mA / 500mA

**COLOUR :**

Warm White (3000K) (609LM ± 5%)

Daylight (4000K) (639LM ± 5%)



Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

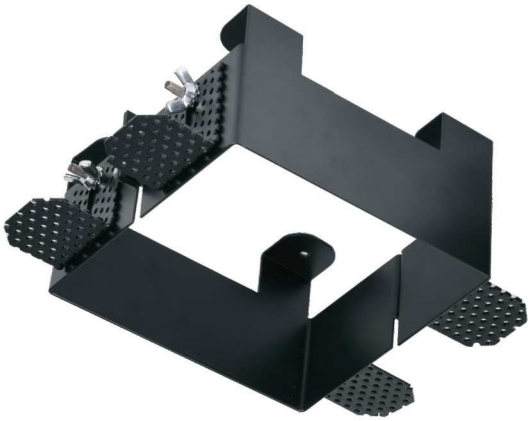

## Model No.: PRO-186

Housing Material : Aluminium Die-Cast
Body Colour : White/Black
Power : 11W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 500mA/20.75V DC

### COLOUR :

Warm White (3000K) (1207LM ± 5%)

Daylight (4000K) (1267LM ± 5%)




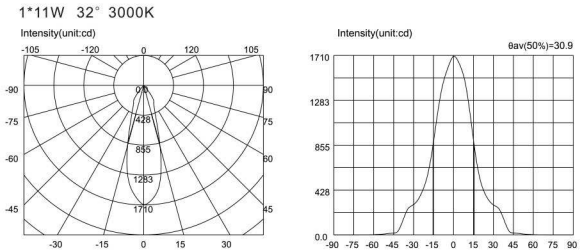


Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20 II

# LED DOWN LIGHT

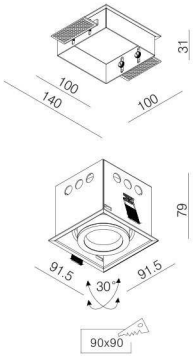


## Model No.: PRO-188

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 11W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 500mA/18.8V DC

**COLOUR :**

Warm White (3000K) (580 LM ± 5%)

Daylight (4000K) (615 LM ± 5%)

## Model No.: PRO-189

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 2X11W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 500mA/2x18.8V DC

**COLOUR :**

Warm White (3000K) (1044LM ± 5%)

Daylight (4000K) (1100LM ± 5%)

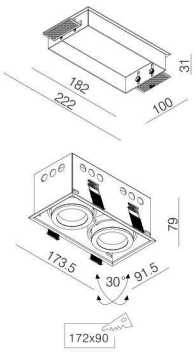








Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

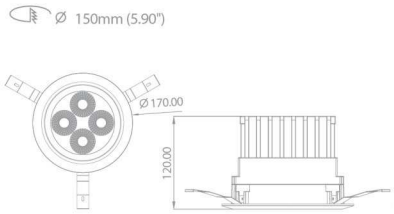


## Model No.: PRO-194

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 52W
Light Source : Sharp LED
Beam Angle : 72°
CRI : 80
Current : 1400mA

**COLOUR :**

Warm White (3000K) (4420 LM ± 5%)

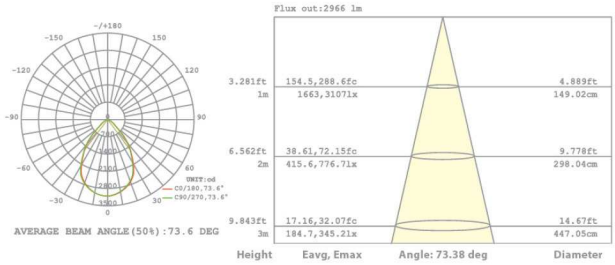


Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

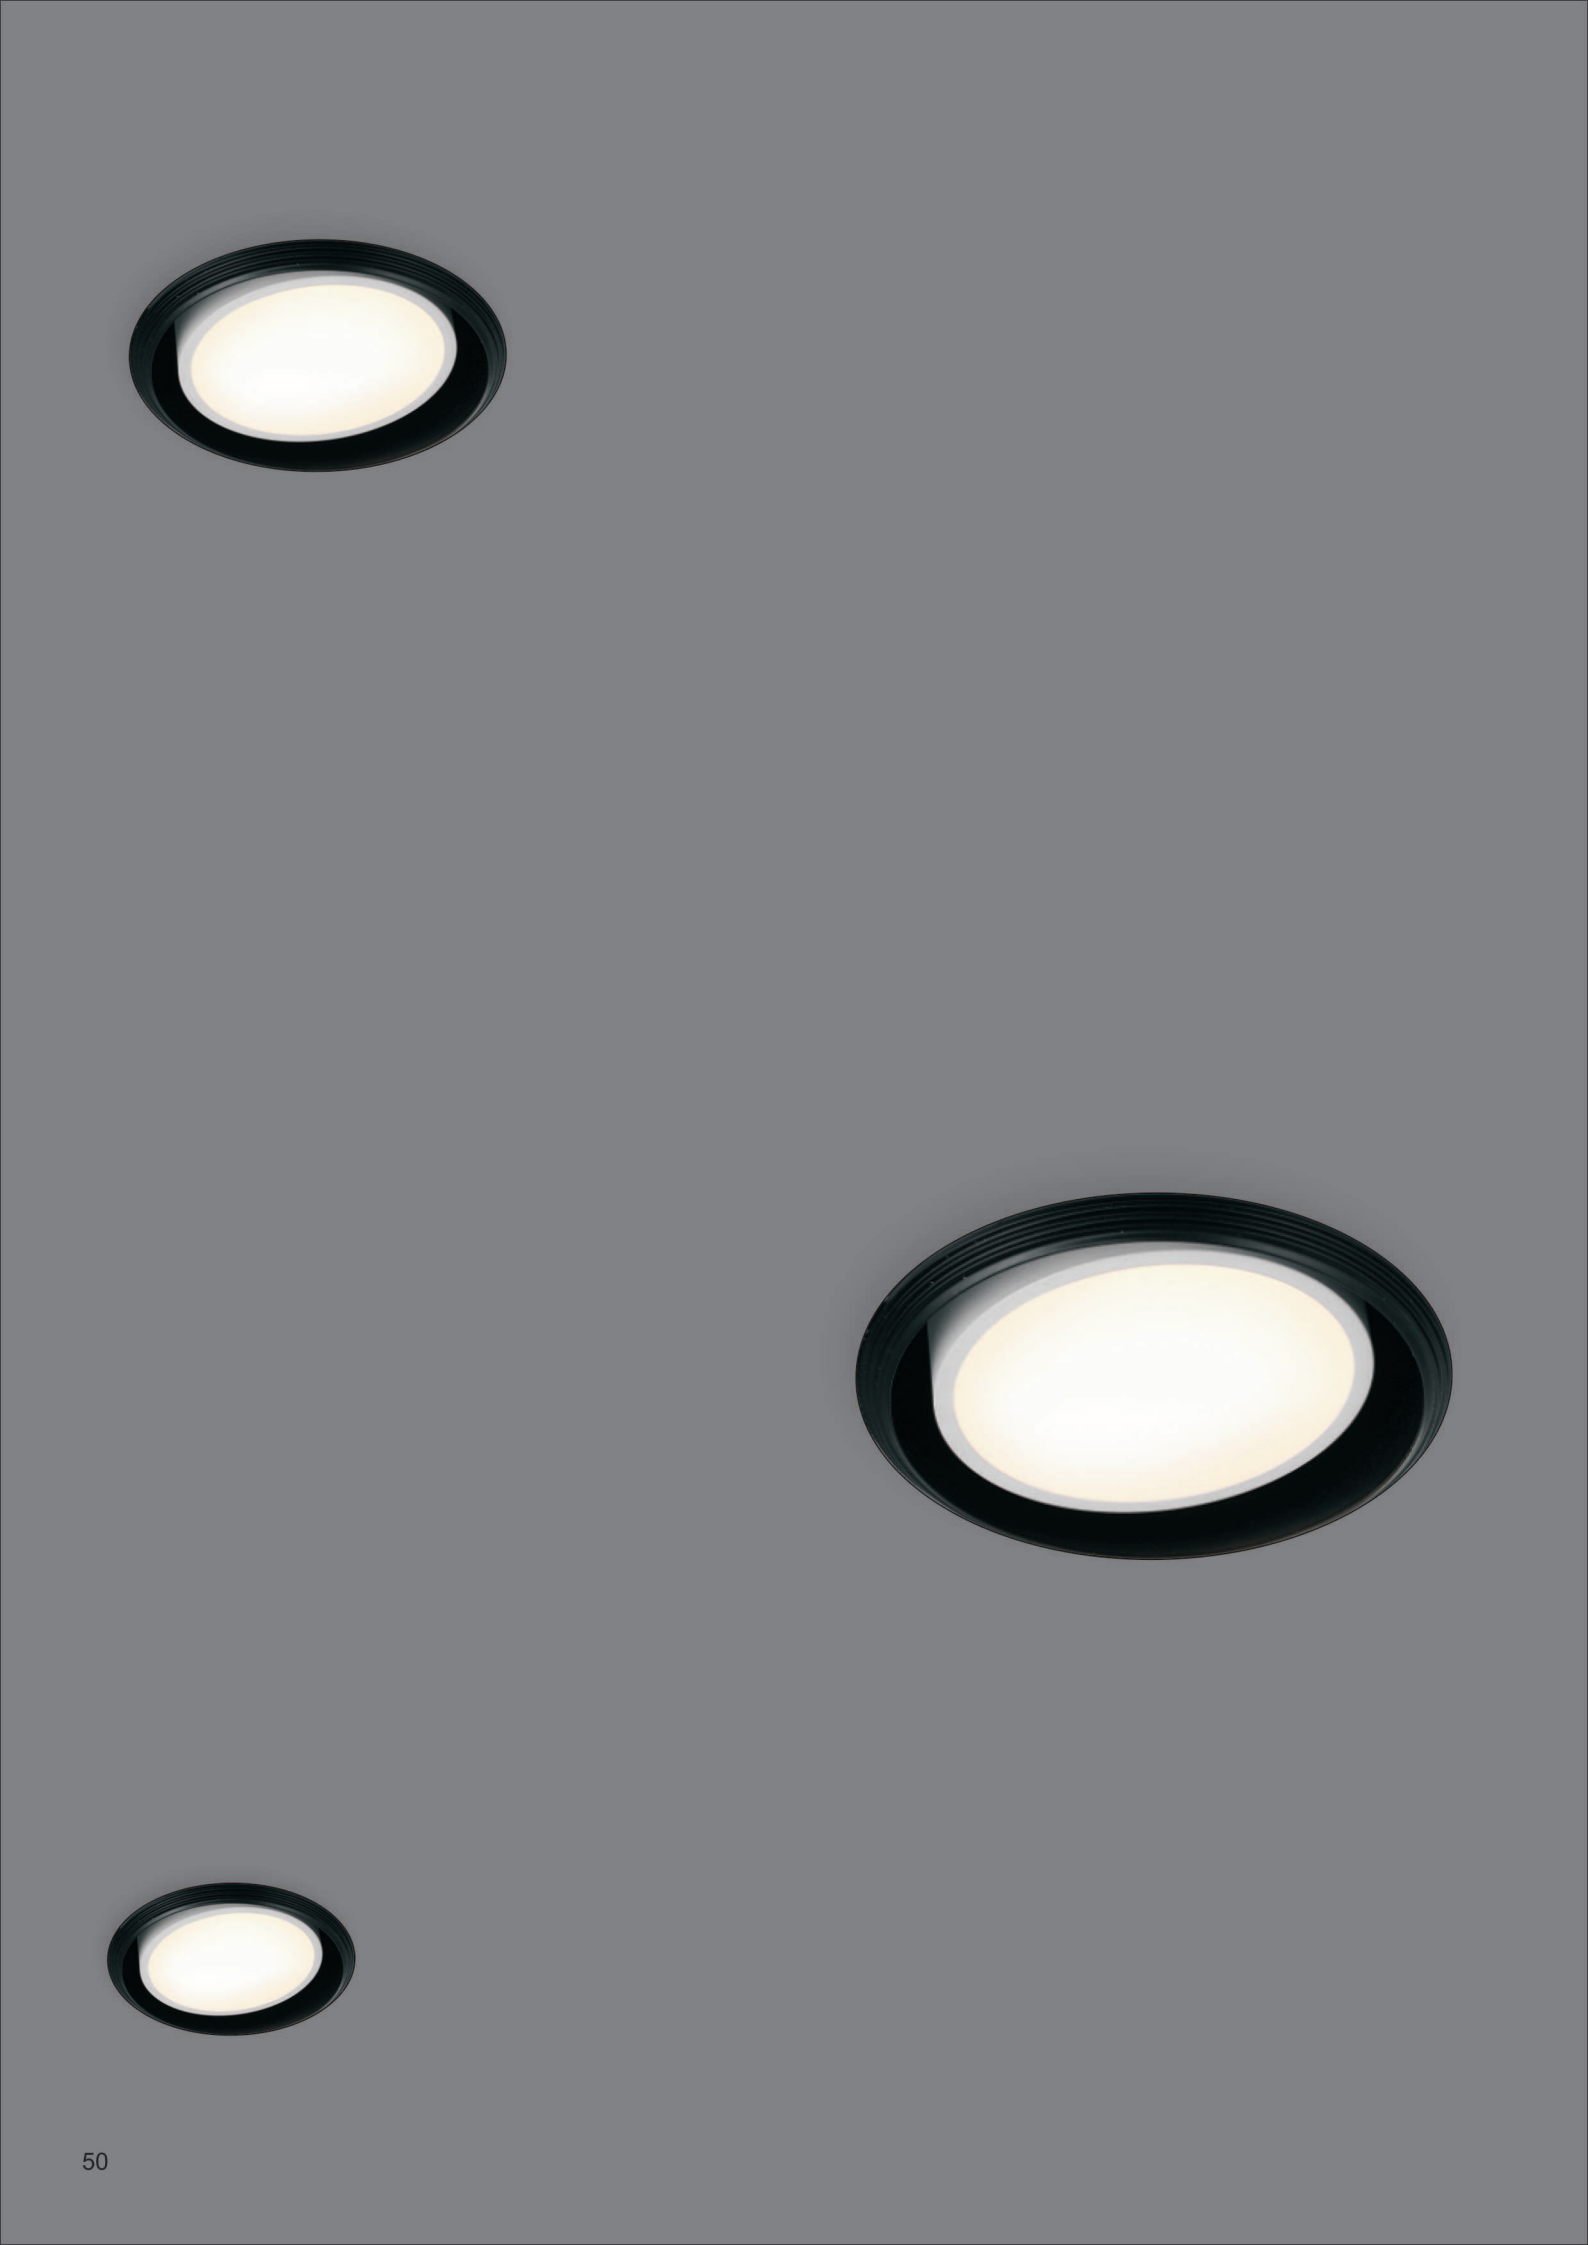

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-201

Housing Material : Aluminium Die-Cast
Body Colour : Black & White
Power : 7W
Light Source : Edison LED
CRI : 80

**COLOUR :**

Warm White (3000K) (408 LM ± 5%)



## Model No.: PRO-202

Housing Material : Aluminium Die-Cast
Body Colour : Black & White
Power : 15W
Light Source : Edison LED
CRI : 80

**COLOUR :**

Warm White (3000K) (1024 LM ± 5%)




Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-207

Housing Material : Aluminium Die-Cast
Body Colour : Black & White
Power : 25W
Light Source : Edison LED
CRI : 80

**COLOUR :**

Warm White (3000K) (1525 LM ± 5%)

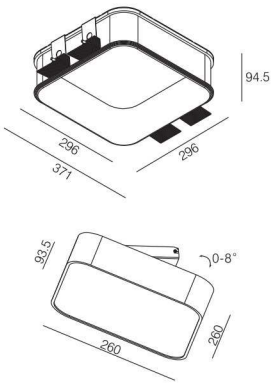


Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT




## Model No.: PRO-213

Housing Material : Aluminium Die-Cast
Body Colour : Black
Power : 12x2.2W
Light Source : Osram LED
Beam Angle : 14°
CRI : 80
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (1445 LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20 III

# LED DOWN LIGHT

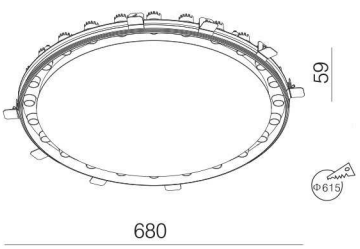


## Model No.: PRO-214

Housing Material : Aluminium Die-Cast
Body Colour : Black
Power : 24x2.2W
Light Source : Osram LED
Beam Angle : 14°
CRI : 80
Current : 700mA/20.75V DC

**COLOUR :**

Warm White (3000K) (1445 LM ± 5%)

Dimmable

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE IP20

# LED DOWN LIGHT

## Model No.: PRO-217

Housing Material : Aluminium
Body Colour : Black
Power : 3x6.2W
Light Source : BRIDGELUX LED
Beam Angle : 15°
CRI : 80
Current : 350mA

**COLOUR :**

Warm White (3000K) (1662 LM ± 5%)

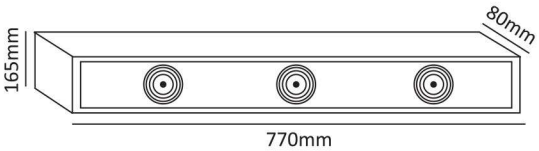

770mm x95mm

## Model No.: PRO-219

Housing Material : Aluminium
Body Colour : Black
Power : 7x6.2W
Light Source : BRIDGELUX LED
Beam Angle : 15°
CRI : 80
Current : 350mA

**COLOUR :**

Warm White (3000K) (3878 LM ± 5%)

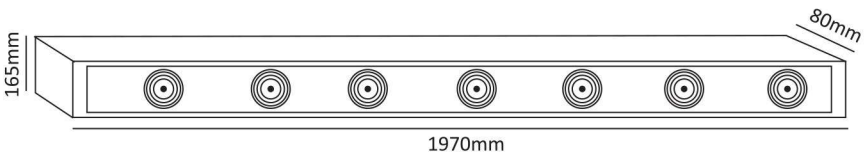

1970mm x95mm

**DIMMING OPTION AVAILABLE WITH ATCO TRIDONIC 1-10V TRACK DIMMING.**

CE F IP20

# LED SURFACE CEILING LIGHT

## Model No.: PRO-301

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (1144LM ± 5%)

Daylight (4000K) (1205LM ± 5%)



## Model No.: PRO-302

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 2x15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (2258LM ± 5%)

Daylight (4000K) (2375LM ± 5%)






CE IP20

HYBEC PRO
lighting the future

# LED SURFACE CEILING LIGHT

## Model No.: PRO-304

Housing Material : Aluminium
Body Colour : White
Power : 7W
Light Source : BRIDGELUX LED
Beam Angle : 28°
CRI : 80
Current : 100-240V, 50/60Hz

**COLOUR :**

Warm White (3000K) (387 LM ±5%)

Daylight (4000K) (406LM ± 5%)

CE IP20

# LED SURFACE CEILING LIGHT

## Model No.: PRO-305

Housing Material : Aluminium Die-Cast
Body Colour : Black
Power : 10W
Light Source : Bridgelux LED
Beam Angle : 28°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (586LM ± 5%)

Daylight (4000K) (615LM ± 5%)




## Model No.: PRO-306

Housing Material : Aluminium Die-Cast
Body Colour : Black
Power : 10W
Light Source : Bridgelux LED
Beam Angle : 28°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (586LM ± 5%)

Daylight (4000K) (615LM ± 5%)






HYBEC PRO
lighting the future

CE IP20

# LED SURFACE CEILING LIGHT

## Model No.: PRO-310

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 40°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (1100LM ± 5%)

Daylight (4000K) (1155LM ± 5%)






HYBEC PRO
lighting the future

CE IP20

# LED SURFACE CEILING LIGHT

## Model No.: PRO-312

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 15W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (1100LM ± 5%)

Daylight (4000K) (1155LM ± 5%)




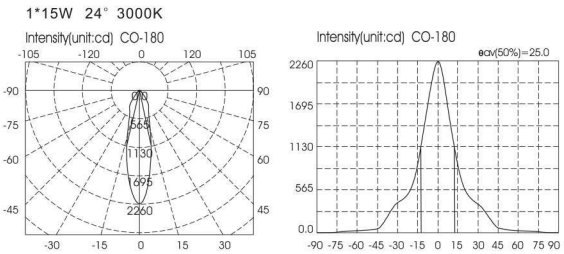

CE IP20

HYBEC PRO
lighting the future

# LED SURFACE CEILING LIGHT

## Model No.: PRO-314

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 11W
Light Source : Bridgelux LED
Beam Angle : 32°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (761LM ± 5%)

Daylight (4000K) (800LM ± 5%)




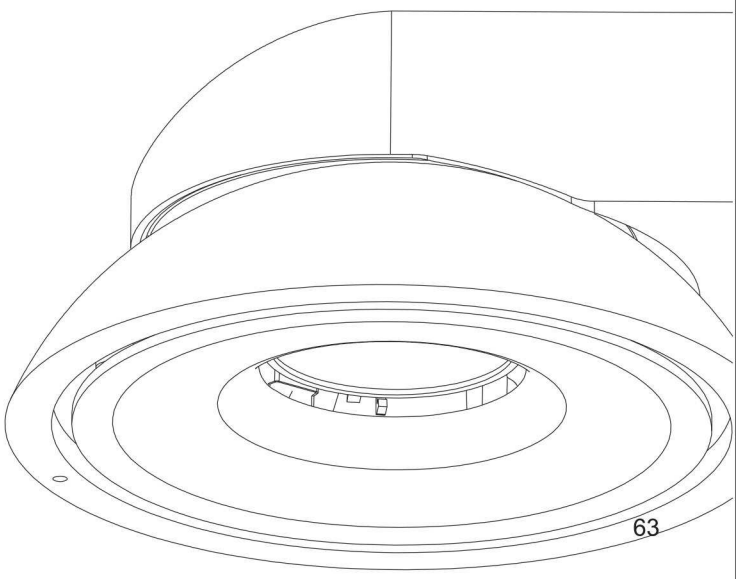

# LED CONCEAL FOOT LIGHT

## IP54

### Model No.: PRO-341

Housing Material : Aluminium Die-Cast
Body Colour : White Matt
Power : 2.2W
Light Source : Osram LED
CRI : 80
Current : 700mA

**COLOUR :**

Warm White (3000K) (151LM ± 5%)




## IP65

### Model No.: PRO-351

Housing Material : Aluminium Die-Cast
Body Colour : White
Power : 1W
Light Source : Cree LED
Beam Angle : 32°
CRI : 90
Current : 100-240V

**COLOUR :**

Warm White (3000K) (1100LM ± 5%)

Daylight (4000K) (1155LM ± 5%)



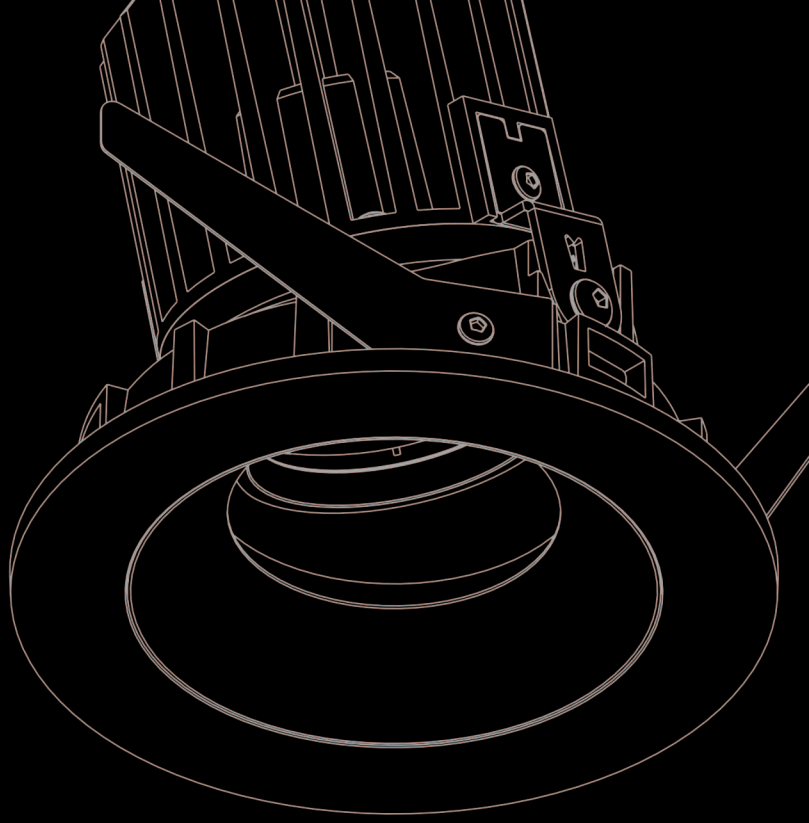

HYBEC® PRO

lighting the future